

Jeff Johnson
Architectural PC
136 EAST THIRD STREET
SUITE B
RIFLE CO, 81650

PHONE 970-625-0580
FAX 970-625-0581

JEFF JOHNSON

Owner/Architect

COLORADO MOUNTAIN COLLEGE SPRING VALLEY SOPRIS – 2021 Glenwood Springs, CO

PRODUCT CUT SHEETS

Item 1	Duplex/Switch wallplate
Item 2	Light switch
Item 10	Robe Hook
Item 11	towel ring
Item 12	Toilet paper holder
Item 13	Towel bar
Item 14	Door stop
Item 17	Outlet/USB charger
Item 20	Outlet GFI
Item 22	Light switch
Item 23	Arc Fault Circuit
Item L1	1x4 LED surface mount - see schedule
Item L2	1x1 LED surface mount - see schedule
Item P1	Toilet - see schedule
Item P2	Toilet ADA - see schedule
Item P3	Sink – see schedule
Item P4	Sink faucet – see schedule
Item P5	Sink ADA – see schedule
Item P6	Sink faucet – ADA - see schedule
Item P7	Shower faucet – see schedule
Item P8	Shower accessory – ADA – see schedule
Item P9	Shower valve – see schedule
Item P10	Shower Pans
Item D1	Entry door – gel coat stain, match others
Item D2	Bathroom door – paint, match others
Item D3	Bathroom accordion door -ADA



Color: White

80401-W

1-Gang Decora/GFCI Device Decora Wallplate/Faceplate, Standard Size, Thermoset, Device Mount - White

Leviton Decora Designer Wallplates — available in a wide spectrum of colors and styles — can add subtle elegance to any home. Sleek, versatile and convenient, they also come in a midway size that gives even greater coverage, and can hide unsightly wall surface irregularities. All Leviton Decorative Wallplates can stand up to heavy use while coordinating perfectly with paint or wall coverings. Think of them as the finishing touch to giving a home its signature look.

Technical Information

Product Features

Color: White

Gang: 1

Material: Thermoset Plastic

Mount: Device


Standards and Certifications: UL/CSA

Type: Standard Size

Warranty: 2-Year Limited

UPC Code: 078477086964

Country Of Origin: United States

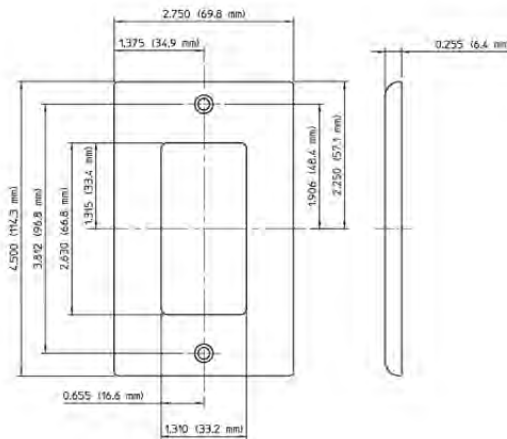

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>



80409-W

2-Gang Decora/GFCI Device Decora Wallplate/Faceplate, Standard Size, Thermoset, Device Mount - White

Leviton Decora Designer Wallplates — available in a wide spectrum of colors and styles — can add subtle elegance to any home. Sleek, versatile and convenient, they also come in a midway size that gives even greater coverage, and can hide unsightly wall surface irregularities. All Leviton Decorative Wallplates can stand up to heavy use while coordinating perfectly with paint or wall coverings. Think of them as the finishing touch to giving a home its signature look.

Technical Information

Product Features

Color : White

Gang : 2

Material : Thermoset Plastic

Mount : Device

Standards and Certifications : UL/CSA

Type : Standard Size

Warranty : 2-Year Limited



UPC Code : 078477151358

Country Of Origin : United States

Available Colors :



Black



Brown




Gray



Ivory



Light Almond

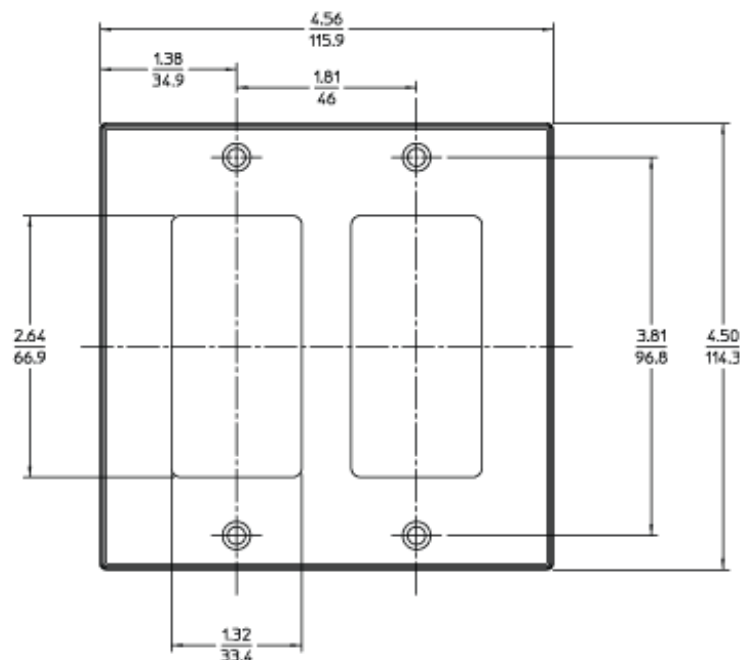



5601-2W

15 Amp, 120/277 Volt, Decora Rocker Single-Pole AC Quiet Switch, Residential Grade, Grounding, Quickwire Push-In & Side Wired - White

Featuring a look and feel that qualify them as modern classics, Decora Designer Rocker Switches add so much at a modest cost that no home should be without them. Their sleek simplicity and smooth, quiet operation stem from quality materials fitted to tight tolerances and finished with great care, ensuring years of trouble-free service. Easy to wire, they work with tungsten, fluorescent and resistive loads. Legendary Decora® Designer Rocker Switches come in a variety of colors to harmonize with any décor. Their sturdy construction and dependable performance are everything you'd expect from the pre-eminent switch maker.

Technical Information

Product Features

Actuator Material: Thermoplastic

Amperage: 15 A

Body Material: Thermoplastic

Color: White

Grounding: Grounding

HP Rating: 1/2HP-120V 2HP-240V-277V

Max. Amperage: 12 Amp

Standards and Certifications: UL/CSA

Strap Material: Steel

Termination: Quickwire Push-In & Side

Voltage: 120/277 VAC


Warranty: 2 Year Limited

Color: White

UPC Code: 078477517086

Country Of Origin: United States

Dimensional Diagram

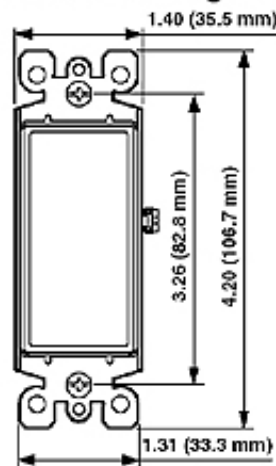

SPECIFICATION SUBMITTAL

JOB NAME: <input style="width: 90%;" type="text"/>	CATALOG NUMBERS: <input style="width: 60%;" type="text"/> <input style="width: 40%;" type="text"/>	
JOB NUMBER: <input style="width: 90%;" type="text"/>	<input style="width: 60%;" type="text"/> <input style="width: 40%;" type="text"/>	



- ☐ **9094**
5" Deep Shelf, projects 6¼"
☐ 18"W ☐ 24"W



- ☐ **9114 Bradex®**
Single Robe Hook, projects 2"

- ☐ **9114-US**
Domestic



- ☐ **9124 Bradex®**
Double Robe Hook, projects 2¼"

- ☐ **9124-US**
Domestic



- ☐ **9134 Bradex®**
Hat and Coat Hook, projects 2½"

- ☐ **9134-US**
Domestic
*US version may vary slightly from
Non-US version. Please contact
customer service for further
information.



- ☐ **9314 Bradex®**
Towel Hook, projects 4⅞"

- ☐ **9314-US**
Domestic



- ☐ **9334 Bradex®**
Towel Ring, projects 2⅞"


- ☐ **9334-US**
Domestic

Orders composed of products indicated as **Bradex®**
will be available to ship in three days after receipt of
order at the factory. There is no pricing penalty for
this service from Bradley.



ACCESSORIES

■ Towel Ring

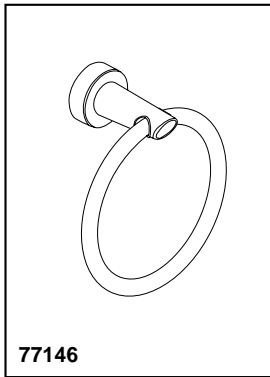


Submitted Model No.: 77146-SS

Specific Features: Stainless Steel

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following fasteners are suggested: Tile/Masonry-Plastic or lead Anchors Plaster/drywall-Toggle bolts.
- Mounting hardware and mounting instructions included with product.

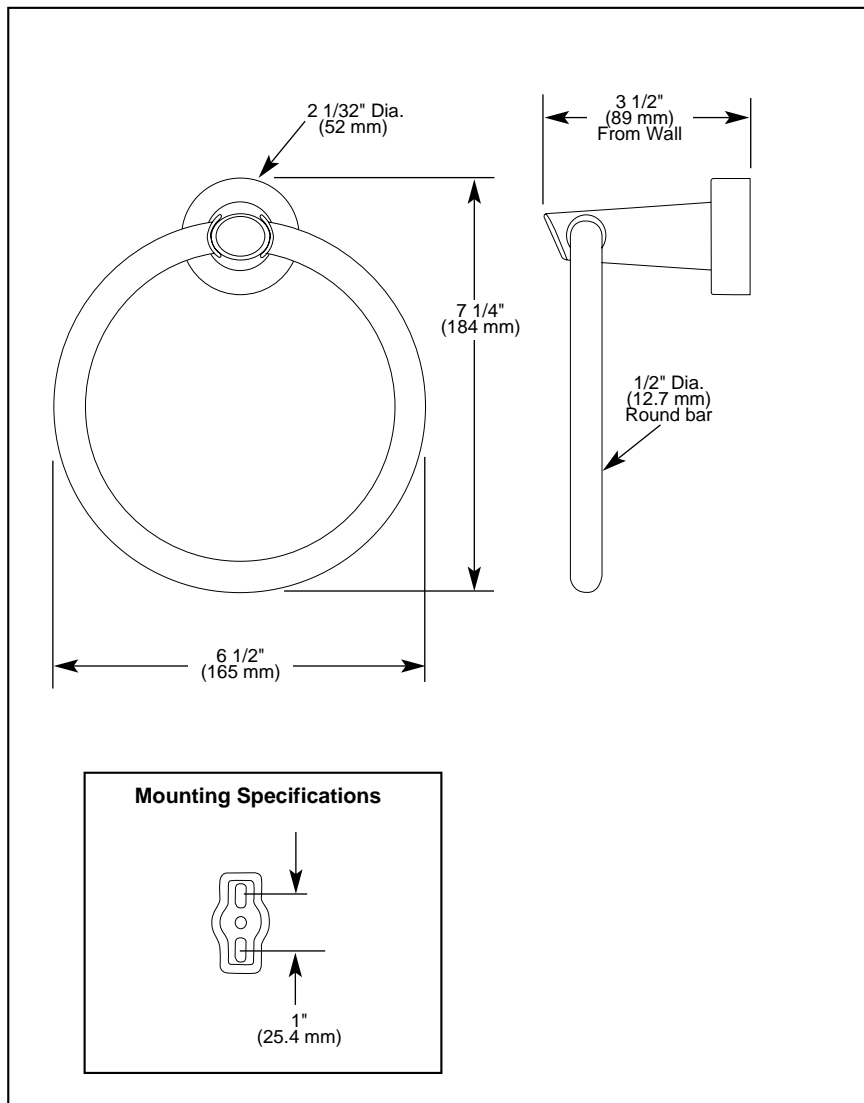

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.




Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2007 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book for finish options and product availability.




ACCESSORIES

- Compel™ Bath Collection
- Tissue Holder

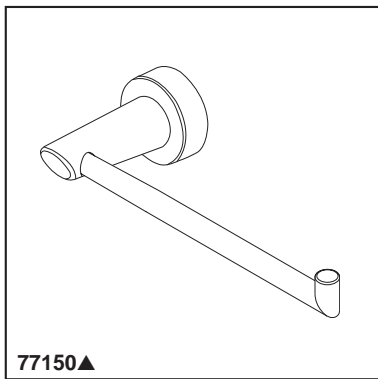

Submitted Model No.: _____

Specific Features: _____

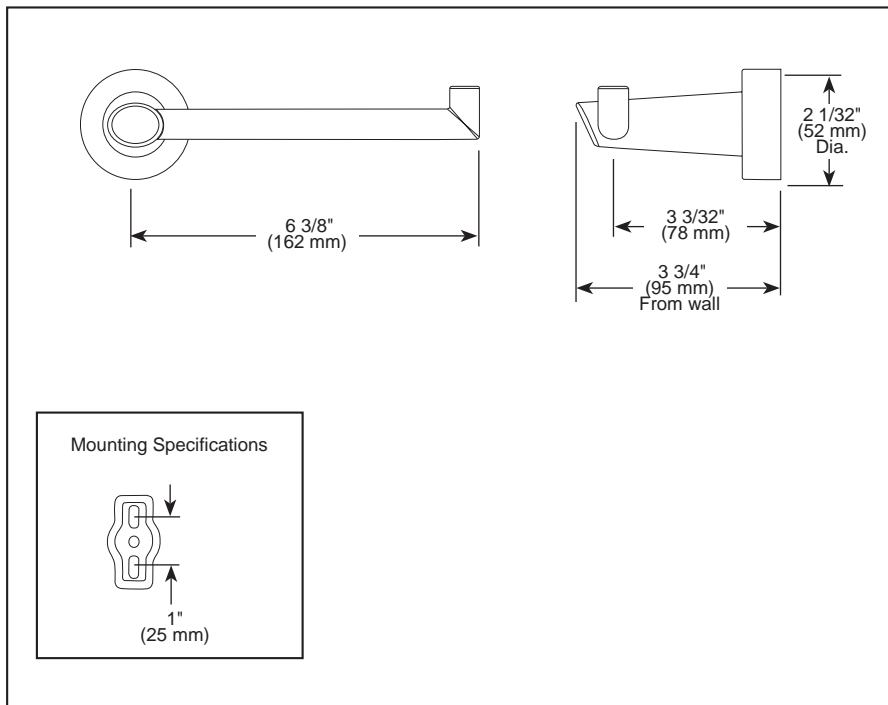

▲ Designate Proper Finish Suffix

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following fasteners are suggested: Tile/Masonry-Plastic or lead Anchors Plaster/drywall-Toggle bolts.
- Mounting hardware and mounting template included with product.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.




Liberty Hardware Manufacturing Corporation
140 Business Park Drive
Winston-Salem, NC 27107
800.542.3789
www.libertyhardware.com
© 2013 LHMC, A Masco Company

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DELTA ACCESSORIES

TAG 13

■ 18" Towel Bar

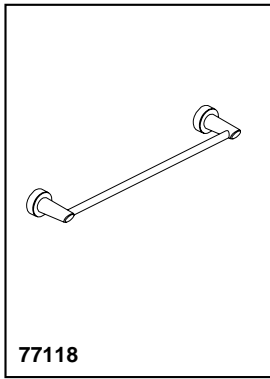


77118

Submitted Model No.: 77118-SS

Specific Features: Stainless Steel

STANDARD SPECIFICATIONS:

- Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following fasteners are suggested: Tile/Masonry-Plastic or lead Anchors Plaster/drywall-Toggle bolts.
- Mounting hardware and mounting template included with product.

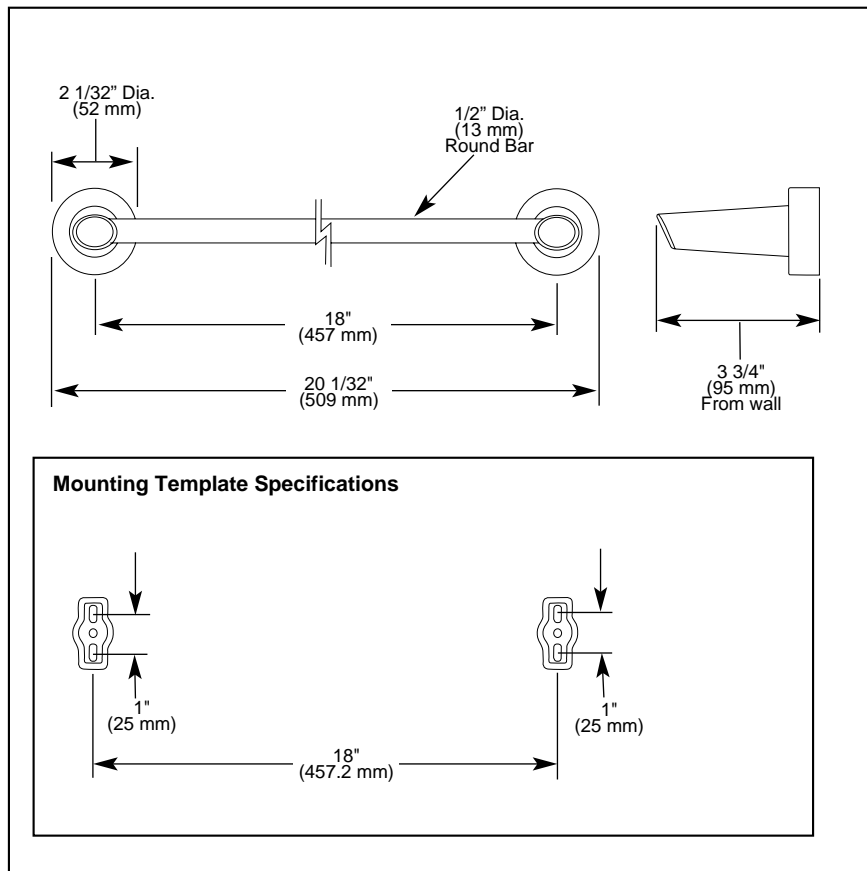

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



Color: White

UPC Code: 078477683866

Country Of Origin: China

NEMA:
5-15R



T5632-W

3.6A USB Type-A/Type-A Wall Outlet Charger with 15A Tamper-Resistant Receptacles

Combination Duplex Receptacle/Outlet and USB Charger. 15 Amp, 125 Volt, Decora Tamper-Resistant Receptacle/Outlet, NEMA 5-15R. 3.6 Amps, 5VDC, 2.0 Type A USB Chargers. Grounding, Side Wired & Back Wired - White

- SMART - Built-in smart chip recognizes the individual device's charging requirement to optimize the charge
- POWERFUL – Two high-powered charging ports with 3.6A of charging power
- CONVENIENT – No more searching for charging adapters! Upgrade your existing outlets so you can charge up to two USB powered electronics at once, leaving the outlets free for additional power needs
- EASY - Compact design fits in a standard wallbox and works with Decora and Decora Plus screwless wallplates.

Technical Information

Product Features

Amperage: 15 A
Brand: Decora
Grade: Residential/Commercial Specification Grade
Grounding: Grounding
Horsepower Rating: 15A-1/2 HP
NEMA: 5-15R
Ratings: 15A-125V
Type: Type A/A Duplex Receptacle
Voltage: 125 VAC

Electrical Specifications

Amperage: 15 A
Flammability: Rated V-0 per UL 94
Grounding: Grounding
Horsepower Rating: 15A-1/2 HP
Operating Temperature: -10°C to 40°C
Ratings: 15A-125V

Environmental Specifications

Body Material: Thermoplastic
Color: White
Cover Material: Thermoplastic
Flammability: Rated V-0 per UL 94
Operating Temperature: -10°C to 40°C
Strap Material: Steel

Material Specifications

Body Material: Thermoplastic
Color: White
Cover Material: Thermoplastic
Product ID: Stamped on Strap
Strap Material: Steel
Terminal Accom.: 14-12 AWG
Terminal ID: Brass-Hot Black-Hot White-Neutral Green-Gnd
Termination: Back & Side
Torque Range: 12-14 inch pounds

Mechanical Specifications

Amperage: 15 A
Color: White
Grade: Residential/Commercial Specification Grade
Product ID: Stamped on Strap
Terminal Accom.: 14-12 AWG
Terminal ID: Brass-Hot Black-Hot White-Neutral Green-Gnd
Termination: Back & Side
Torque Range: 12-14 inch pounds

Standards and Certifications

FCC Part 15: Class B
Listed: cCSAus
NOM: 057
Warranty: 5 Year Limited

Features and Benefits

- Perfect for use in residential applications such as kitchens, bedrooms and home offices and in commercial applications such as hotels, airports, restaurants and



Color: White

UPC Code: 078477714157

Country Of Origin: China

NEMA:
5-20R



GFNT2-PW

20 Amp, 125 Volt Receptacle, 20 Amp Feed-Through, Self-test SmartlockPro Slim GFCI, monochromatic, back and side wired, screw less wallplate with a subplate and self grounding clip included - White

Peace of mind, all the time. The SmartlockPro Self-Test GFCI tests itself even if you forget. Designed to meet the latest UL standard for auto-monitoring (self-test) our complete line of self-test GFCIs periodically conduct an automatic internal test to confirm that it can respond to a ground fault. With the slimmest profile on the market, the device allows for fast and easy installation, while Leviton's patented reset lockout mechanism prevents reset of the GFCI if it is not wired or operating correctly. The SmartlockPro Self-Test GFCI is the smart choice in ground fault circuit interrupter protection.

Technical Information

Product Features

Amperage: 20 A

At Rated Voltage: 1 HP

Brand: SmartlockPro

Color: White

Feature: Self-Test

Fed Spec WC-596: Yes

Grade: Residential/Commercial Specification Grade

Grounding: Self Grounding

NEMA: 5-20R

Pole: 2

Standards and Certifications: UL/CSA

Strap Material: Galvanized Steel

Tamper Resistant: No

Termination: Back & Side

Trip Level: Class A, 5mA plus or minus 1mA

Type: Standard Duplex

Voltage: 125 VAC

Warranty: 2-Year Limited

Wire: 3

AC Horsepower Ratings

At Rated Voltage: 1 HP

Dielectric Voltage: Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06

Short Circuit Current Rating: 10KA

Temperature Rise: Max 30C after 100 cycles OL at 150 percent rated current

Electrical Specifications

Dielectric Voltage: Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06

Operating Temperature: -35C to +66C

Short Circuit Current Rating: 10KA

Temperature Rise: Max 30C after 100 cycles OL at 150 percent rated current

Environmental Specifications

Body Material: Polycarbonate

Line Contacts: Brass Triple Wipe .031 Thick

Notes: Wallplate included

Product ID: Ratings are permanently marked on device

Terminal Accom.: 14-10 AWG

Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral

Terminal Screws: Plated Steel

Yoke: Zinc-Plated Steel

Mechanical Specifications

Amperage: 20 A

Body Material: Polycarbonate

Brand: SmartlockPro

Color: White

Face Material: Thermoplastic

Feature: Self-Test

Fed Spec WC-596: Yes

Grade: Residential/Commercial Specification Grade

Grounding: Self Grounding

NEMA: 5-20R

Notes: Wallplate included

Pole: 2

Product ID: Ratings are permanently marked on device

Standards and Certifications: UL/CSA

Strap Material: Galvanized Steel

Tamper Resistant: No

Terminal Accom.: 14-10 AWG

Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral

Termination: Back & Side

Trip Level: Class A, 5mA plus or minus 1mA

Type: Standard Duplex

Voltage: 125 VAC

Warranty: 2-Year Limited

Wire: 3

Standards and Certifications



Color: **N/A** White, Ivory,
Light Almond

UPC Code: 078477692363

Country Of Origin: China

DSE06-10Z

Decora Electronic Low Voltage, dimmable LED and CFL Rocker-Slide Dimmer, 600VA-120VAC Electronic Low Voltage, 300W-120VAC Dimmable LED and CFL, 60Hz, Neutral required, Single Pole or 3-Way - White, Ivory & Light Almond

Leviton Decora Rocker-Slide Dimmers provide smooth, slide-action, full-range dimming for Electronic Low Voltage loads, dimmable LEDs and dimmable CFL loads. They combine a Decora rocker switch with a contemporary full-range slender slide bar for precise lighting control. With a new, streamlined style, Decora dimmers and fan speed control complement any interior design and are compatible with other Decora devices.

Technical Information

Product Features

Action: Rocker Switch for ON/OFF, slide bar for lighting level control

Available Colors: Ivory-I Wht-W Gry-G Blk-E Brwn-B Light Almond-T, R-Red

Color: White, Ivory, Light Almond

Load Rating: 600VA Electronic Low Voltage, 300W LED and CFL

Load Type: Electronic Low Voltage, Dimmable LED, Dimmable CFL

Neutral: Required

Ordering Notes: Included White, Ivory and Light Almond Color Kit

Preset: Slide bar preserves desired lighting level

Protection: Radio/TV Filter

Standards and Certifications: cCSAus, NOM

Style Name: Decora

Switch Type: Single-Pole & 3-Way

Type: Dimmer

Voltage: 120 VAC

Wallplate: Order Separately

Warranty: 5-Year Limited

Features and Benefits

- New aesthetically pleasing design with rocker switch and slender dimmer control slide bar
- Integrated linear full-range slide control for easy, precise operation
- Wired using leads, a Neutral wire is required for operation
- Controls Electronic Low Voltage loads and a variety of dimmable LED and CFL lamps
- Single pole or 3-way operation (when using 3-way switch); packaged with White, Ivory, and Light Almond color change kits
- Additional color change kits available in Black, Brown, Red and Gray
- Slim, compact housing fits easily into a standard wallbox and is suitable for multi-gang installations with other Decora products
- The slide bar location preserves the selected brightness level when the dimmer is switched OFF
- No fins for multi-gang installation
- Built-in radio/TV interference filter

Data Bulletin

QO™ and Homeline™ Combination Arc Fault Circuit Interrupter (CAFI)

Miniature Circuit Breaker, 120 V 60 Hz
Class 0700

Retain for future use.



Commercial status	Commercialized
Product type	Miniature Circuit Breaker
Range of product(s)	QO, Homeline, CHOM, CAFI
I _n rated current	15 and 20 A
Product certifications	CSA® (CHOM and QO) UL® Listed (HOM and QO)
U _e rated operational voltage	120 Vac
Mounting mode – line side	Plug-on, Bolt-on (QOB)
Mounting mode – neutral	Pigtail, Plug-on
Pole description	One pole
Short-circuit current	10 kA (QO(B), HOM, CHOM) 22 kA (QO(B)-VH)
Number of spaces required	One
Circuit breaker type	Combination arc fault circuit interrupter
Additional ratings	HACR, SWD, and HID rated
Electrical connection	Pressure plate
AWG gauge	14—8 AWG aluminum/copper
Accessory/separate Part type	None

Dimming load

Up to 2000 watts verified compatibility with home lighting automation and dimming components, including Lutron Lighting Controls® listed below:

HomeWorks®

RadioRA®

Grafik Eye®

Wall-mounted dimmer

Schneider Electric USA, Inc.

1415 S. Roselle Road

Palatine, IL 60067 USA

1-888-778-2733

www.schneider-electric.us

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

© 2013 Schneider Electric All Rights Reserved

Schneider Electric and Square D are trademarks owned by Schneider Electric Industries SAS or its affiliated companies. All other trademarks are the property of their respective owners.



by Schneider Electric



62-1054

45W/LED/1X4/FLUSH/3K/WH
 45 watt; 12" x 48" Surface Mount LED Fixture; 3000K; 90 CRI;
 Low Profile; White Finish; 120/277 volts

Features

- Surface mount LED fixture
- Solid State LED lighting
- Long life
- 5 Year limited warranty
- Damp location rated
- 90+ CRI
- Dimensions: 11-5/8" x 47-1/4" x 0-3/4"



62-1054

Item Number	Product Line	UPC	Voltage	Watts	Fixture Type	Lamp Code	Dimmable/Non-Dimmable			
62-1054	BLINK	045923410543	120/277	45	Surface Mount	45W/LED/1X4/FLUSH/3K/WH	Dimmable - 120V only			
Suggested Dimmers			Finish	Initial Lumens	Average Rated Hours		Kelvin Temp	Color	CRI	Pack
Compatible dimmers for 62-1054			White	3600	50000		3000	Soft White	90+	2
Package Type		ENERGY STAR	RoHS Compliant		UL or ETL Listed	UL Classification			Warranty	
Box	ENERGY STAR		Yes		Yes	cETLus - Damp Location Rated			5 Year Limited	



National Toll-Free:
 800.43.SATCO
 (800.437.2826)
www.satco.com

Distribution Centers:
 New York, Florida, Texas,
 Washington, California,
 Puerto Rico

Corporate Offices:
 110 Heartland Blvd.,
 Brentwood, NY 11717
 800.437.2826 631.243.2022
 Fax 631.243.2027





62-1051

18W/LED/1X1/FLUSH/3K/WH
 18 watt; 12" x 12" Surface Mount LED Fixture; 3000K; 90 CRI;
 Low Profile; White Finish; 120/277 volts

Features

- Surface mount LED fixture
- Solid State LED lighting
- Long life
- 5 Year limited warranty
- Damp location rated
- 90+ CRI
- Dimensions: 11-5/8" x 11-5/8" x 0-3/4"



62-1051

Item Number	Product Line	UPC	Voltage	Watts	Fixture Type	Lamp Code	Dimmable/Non-Dimmable		
62-1051	BLINK	045923410512	120/277	18	Surface Mount	18W/LED/1X1/FLUSH/3K/WH	Dimmable - 120V only		
Suggested Dimmers			Finish	Initial Lumens	Average Rated Hours	Kelvin Temp	Color	CRI	Pack
Compatible dimmers for 62-1051			White	1300	50000	3000	Soft White	90+	4
Package Type		ENERGY STAR	RoHS Compliant		UL or ETL Listed	UL Classification		Warranty	
Box	ENERGY STAR		Yes		Yes	cETLus - Damp Location Rated		5 Year Limited	



National Toll-Free:
 800.43.SATCO
 (800.437.2826)
www.satco.com

Distribution Centers:
 New York, Florida, Texas,
 Washington, California,
 Puerto Rico

Corporate Offices:
 110 Heartland Blvd.,
 Brentwood, NY 11717
 800.437.2826 631.243.2022
 Fax 631.243.2027





CADET® PRO™ ELONGATED TOILET VITREOUS CHINA

CADET® PRO™ ELONGATED TOILET

□ 215CA.104

- Features the **Cadet® Flushing System**
- Vitreous china
- High Efficiency Toilet (HET), ultra-low consumption (4.8 Lpf/1.28 gpf), utilizes 20% less water
- Meets EPA WaterSense® criteria
- Trade exclusive tank
- PowerWash® rim scrubs bowl with each flush
- Robust metal trip lever & metal shank fill valve
- Includes EZ-Install Tools w/color match bowl caps
- EverClean® surface included
- 3" flush valve
- Fully-glazed 2-1/8" trapway
- 12" (305mm) rough-in
- Generous 9" x 8" water surface area
- Chrome finish trip lever is supplied
- 1,000g MaP Score** at 1.28 gpf
- 5 year warranty

□ 3517C.101 Elongated Bowl

□ 4188A.104 Tank


Nominal Dimensions:

767 x 441 x 733mm (30-1/8" x 17-3/8" x 28-7/8")

Fixture only, seat and supply sold separately

Alternative Tank Configurations Available:

- 4188A.154 Tank complete with Aquaguard Liner
- 4188A.155 Tank complete with Aquaguard Liner and trip lever located on right side
- 4188A.164 Tank complete with tank cover locking device
- 4188A.174 Tank complete with Aquaguard Liner and tank cover locking device
- 4188A.105 Tank complete with trip lever located on right side
- 4188A.165 Tank complete with tank cover locking device and trip lever located on right side

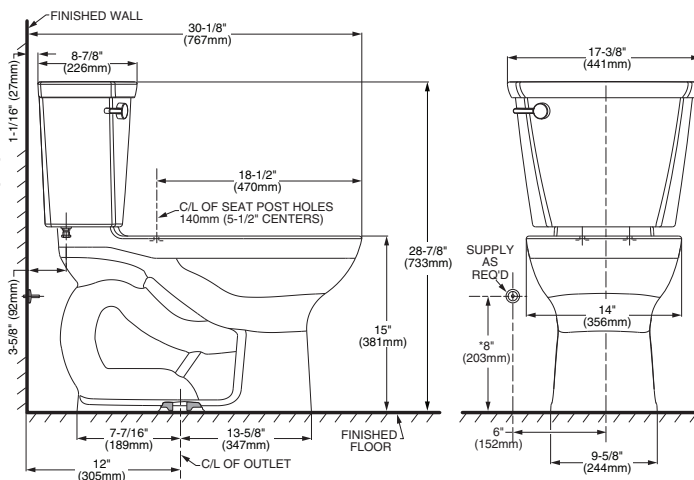

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HETs

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

** Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Veritec Consulting, Inc. and Koeller and Company.

To Be Specified:

- Color: □ White □ Bone □ Linen □ Black
- Seat: #5321.110 EverClean® Elongated Seat with Slow Close Snap-Off Hinges
- Supply with stop:



Cadet® PRO™



BARRIER FREE

CADET® PRO™ RIGHT HEIGHT® ELONGATED TOILET

VITREOUS CHINA

CADET® PRO™ RIGHT HEIGHT® ELONGATED TOILET

❑ 215AA.104

- Features the **Cadet® Flushing System**
- Vitreous china
- High Efficiency Toilet (HET), ultra-low consumption (4.8 Lpf/1.28 gpf), utilizes 20% less water
- Meets EPA WaterSense® criteria
- Trade exclusive tank
- PowerWash® rim scrubs bowl with each flush
- Robust metal trip lever & metal shank fill valve
- Includes EZ-Install Tools w/color match bowl caps
- EverClean® surface included
- 3" flush valve
- Fully-glazed 2-1/8" trapway
- 16-1/2" rim height for accessible applications
- 12" (305mm) rough-in
- Generous 9" x 8" water surface area
- Chrome finish trip lever is supplied
- 1,000g MaP Score** at 1.28 gpf
- 5 year warranty

❑ 215AA.105 Same as above except with trip lever on right side

✓ 3517A.101 Right Height® Elongated Bowl

❑ 4188A.104 Tank

Nominal Dimensions:

767 x 441 x 771mm (30-1/8" x 17-3/8" x 30-3/8")

Fixture only, seat and supply sold separately

Alternative Tank Configurations Available:

- ❑ 4188A.154 Tank complete with Aquaguard Liner
- ❑ 4188A.155 Tank complete with Aquaguard Liner and trip lever located on right side
- ❑ 4188A.164 Tank complete with tank cover locking device
- ❑ 4188A.174 Tank complete with Aquaguard Liner and tank cover locking device
- ❑ 4188A.105 Tank complete with trip lever located on right side
- ❑ 4188A.165 Tank complete with tank cover locking device and trip lever located on right side

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HETs

** Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Veritec Consulting, Inc. and Koeller and Company.

To Be Specified:

- ❑ Color: ☒ White ☐ Bone ☐ Linen ☐ Black
- ❑ Seat: #5321.110 EverClean® Elongated Seat with Slow Close Snap-Off Hinges
- ❑ Supply with stop:

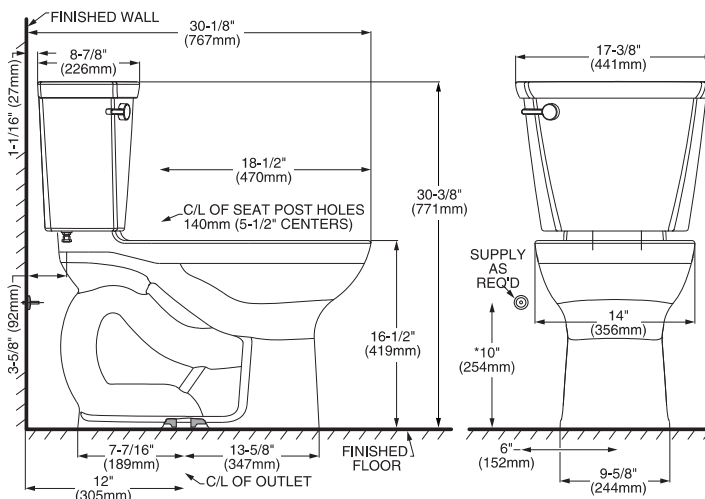

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.



Cadet® PRO™

TAG P2




- Compel™ Bath Collection
- Universal Tank Lever



Submitted Model No.:

Specific Features:

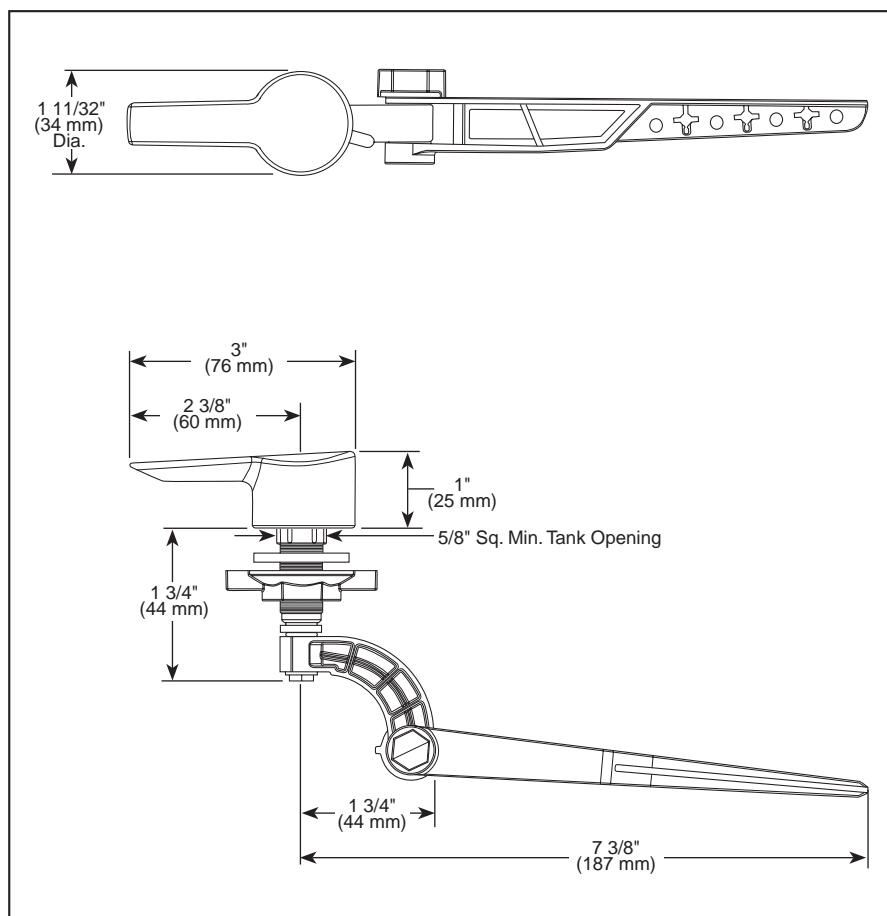

- Installation instructions included with product.
- Universal left front or left side mount tank lever.
- Can work in right side mount toilets.

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

▲ Designate proper finish suffix



Liberty Hardware Manufacturing Corporation
140 Business Park Drive
Winston-Salem, NC 27107
800.542.3789
www.libertyhardware.com
© 2013 LHMC, A Masco Company

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



Molded Wood Toilet Seats

PFTSWE1001WH / PFTSWE2001WH

Product Features

- Durable, high quality
- Molded wood construction
- Available in round or elongated
- Closed front with cover
- Plastic top mount hinge
- Easy installation
- Color matched bumpers
- Multi-coat enamel finish



PFTSWE1001WH



PFTSWE2001WH

Model Numbers

PFTSWE1001WH

PFTSWE2001WH

Round front wood toilet seat, white

Elongated wood toilet seat, white





Available Parts

LIN101036

Replacement bolts

Product Specification

PFTSWE2001WH

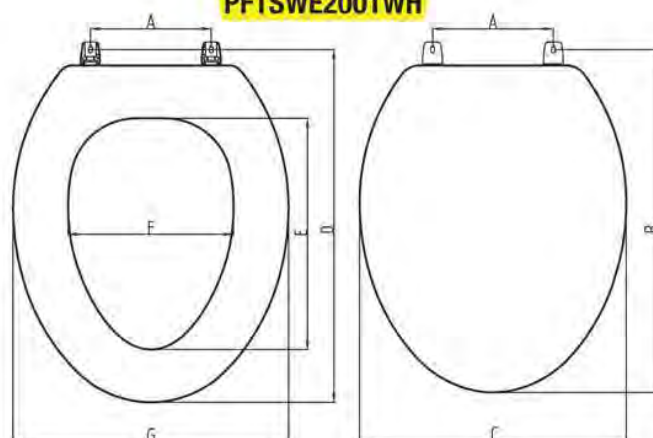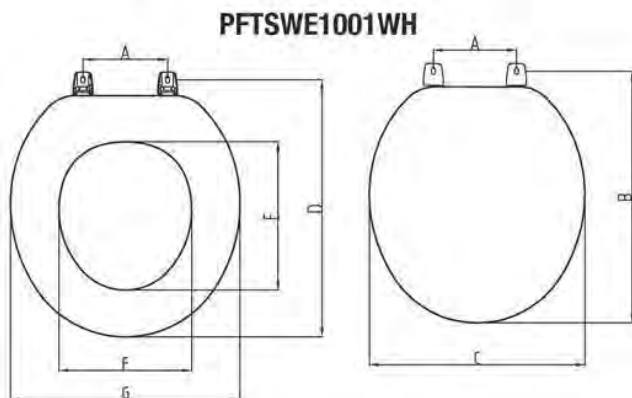

Model Numbers	Dimensions						
	A	B	C	D	E	F	G
PFTSWE1001WH	5-1/2"	16-1/2"	13-3/4"	16-3/4"	10	8-3/4"	14-1/2"
PFTSWE2001WH	5-1/2"	18"	13-3/4"	18-1/2"	11-7/8"	8-1/2"	14-1/4"

Warranty and Codes

PROFLO toilet seats carry a 1-year limited warranty. In an effort to continually improve our products, We will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.

American Standard

Style That Works Better

 BARRIER FREE

STUDIO™ UNDERCOUNTER SINK VITREOUS CHINA

STUDIO™ UNDERCOUNTER SINK

- Rectangular undercounter mount sink
- Made from vitreous china
- Front overflow
- Supplied with mounting kit (047194-0070A) and template



☒ 0614.000 Unglazed Rim

540 x 387mm
(21-1/4" x 15-1/4")

☐ 0614.300 Glazed underside

Bowl size:

464mm (18-1/4") wide
308mm (12-1/8") front to back
171mm (6-3/4") deep

☐ 0618.000 Unglazed Rim

600 x 422mm
(23-5/8" x 16-5/8")

☐ 0618.300 Glazed underside

Bowl size:

537mm (21-1/8") wide
356mm (14") front to back
152mm (6") deep

Compliance Certifications - Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

To Be Specified:


- ☐ Color: ☒ White ☐ Bone
☐ Linen ☐ Black
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:

* See faucet section for additional models available





**MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 ACCESSIBLE AND USABLE
BUILDINGS AND FACILITIES - CHECK LOCAL CODES.**

- Countertop 864mm (34") from finished floor. Lavatory installed 102mm (4") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

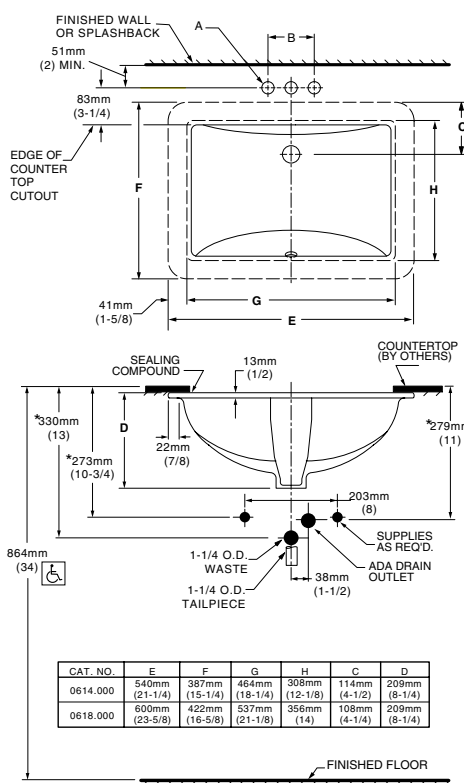

FITTING	A	B
CENTER-SET	1-1/16 (27mm)	4 (102mm)
SPREAD	1-1/4 (32mm)	8 (203mm)

▼ DETAIL OF MOUNTING CLIP (KIT No. 47194.0070A)

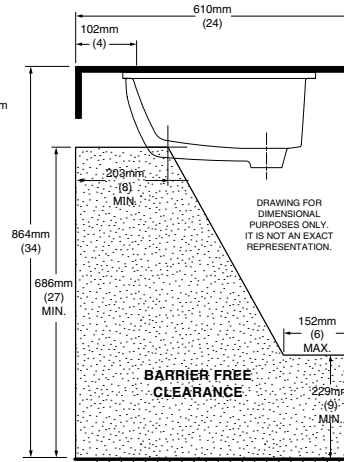


NOTES:

WE RECOMMEND USING BASIN AS A TEMPLATE TO DETERMINE PROPER CONTOUR. CUT COUNTERTOP 38MM (1-1/2") INSIDE BASIN CONTOUR.
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P" TRAP ARE SUGGESTED.



▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

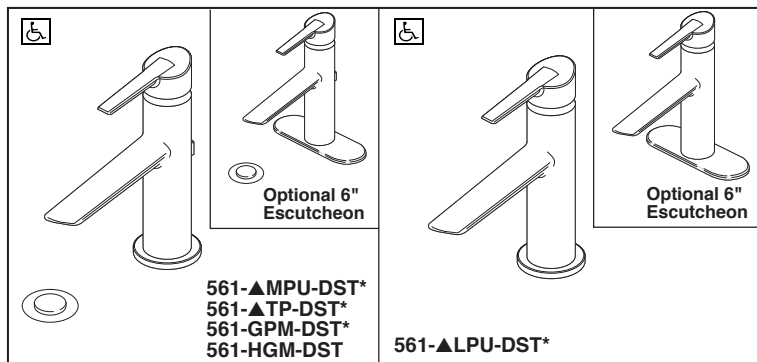

Submitted Model No.: _____

Specific Features: _____

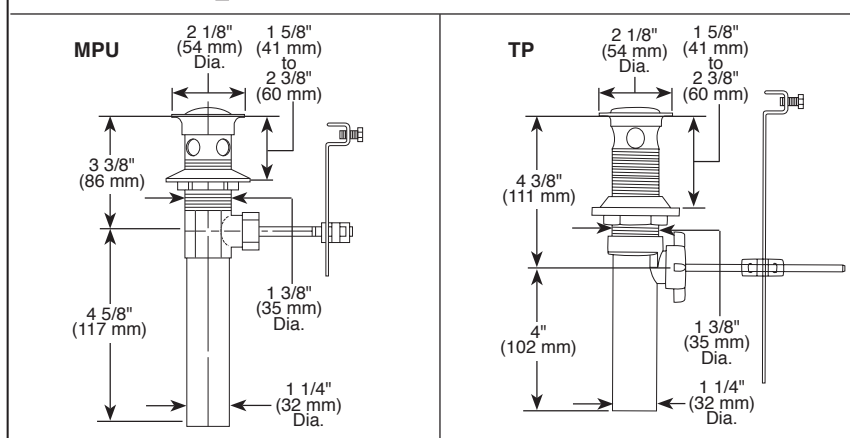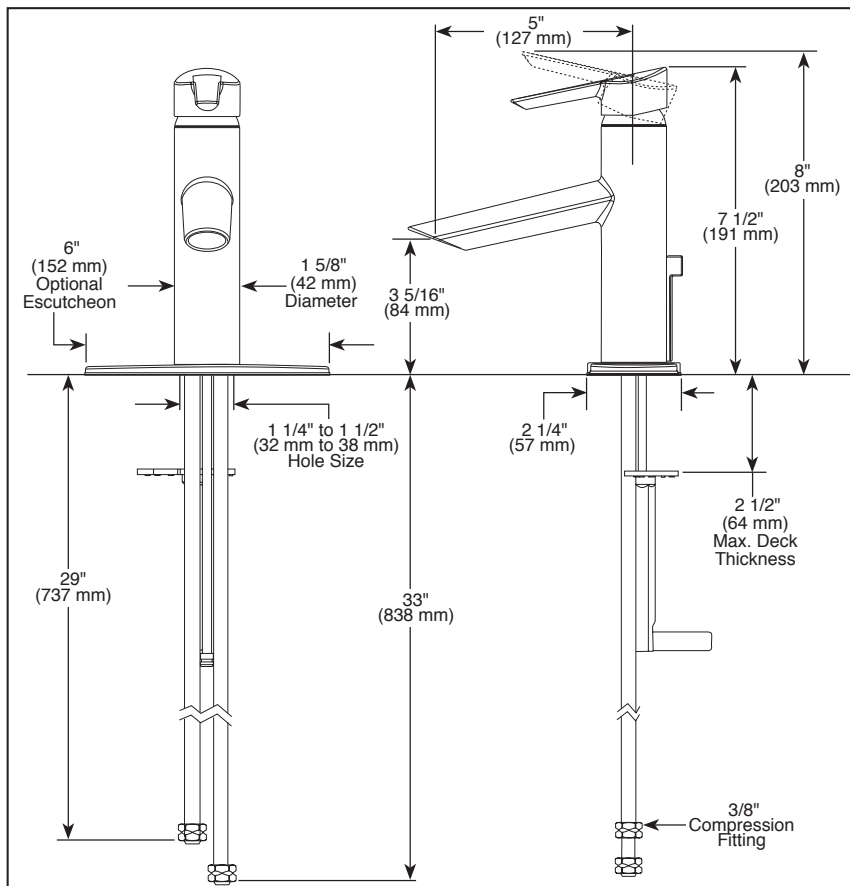

▲ Designate Proper Finish Suffix



LAVATORY FAUCETS

- Compel® Collection
- Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Maximum 1.50 gpm @ 60 psi, 5.70 L/min @ 414 kPa
- GPM indicates max. 1.00 gpm @ 60 psi, 3.80 L/min @ 414 kPa
- HGM indicates max. 0.50 gpm @ 60 psi, 1.90 L/min @ 414 kPa
- One or three hole mount (escutcheon optional, included)
- Diamond coated ceramic cartridge
- Red/blue indicator markings
- 3/8" O.D. straight, staggered PEX supply tubes
- Models with suffix "MPU" have metal drain with pop-up type fitting with plated flange and stopper
- Models with suffix "LPU" are less pop-up
- Models with suffix "TP" have 50/50 pop-up type fitting with plated flange and stopper

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2



Indicates compliance to ICC/ANSI A117.1

- ★ EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.


561SSMPUDST ✓



55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2016 Masco Corporation of Indiana


Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-561-MPU-DST Rev. D


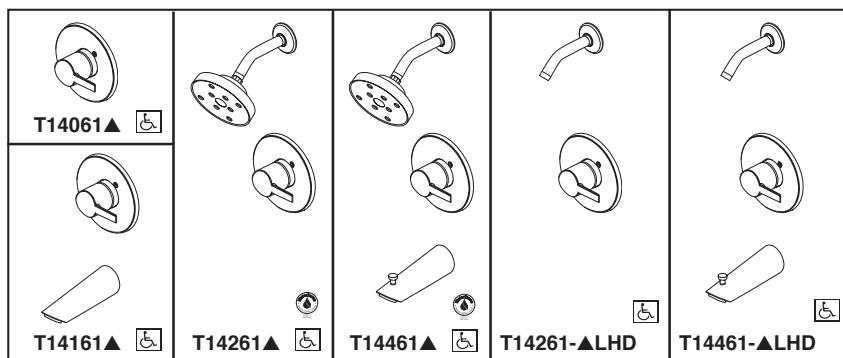


Submitted Model No.: _____

Specific Features: _____


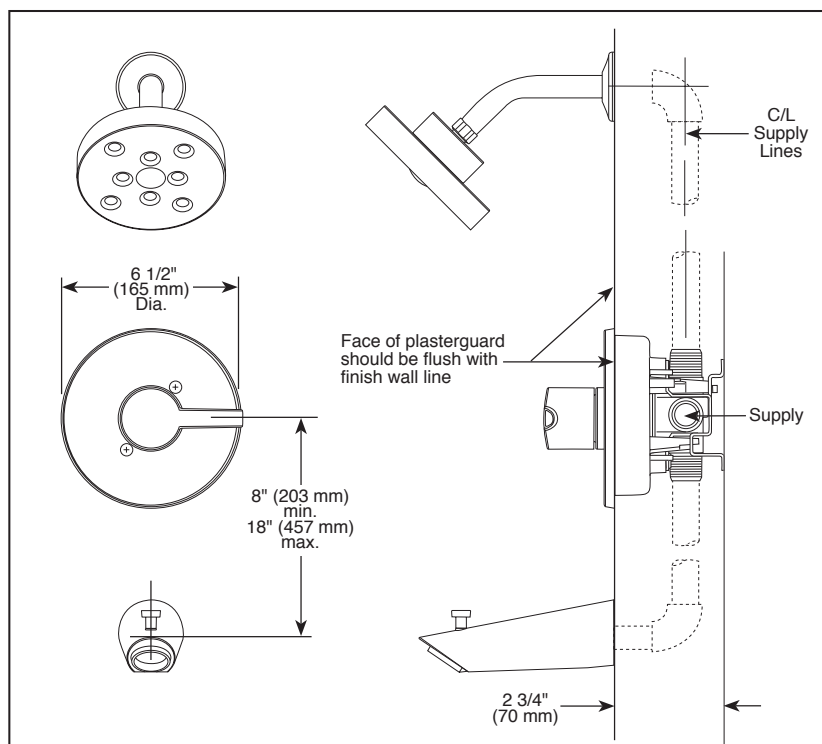


▲ Designate Proper Finish Suffix

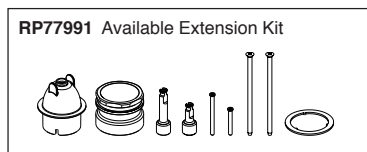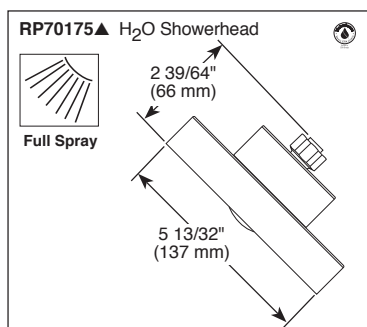

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T14061 Rev. G

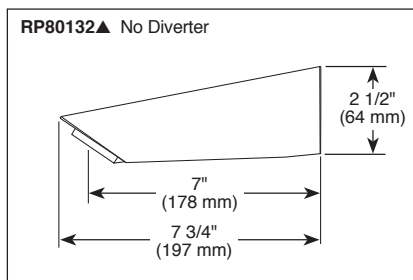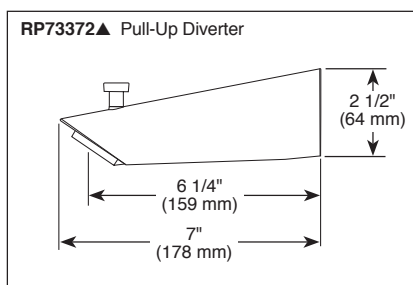

TUB AND SHOWER FAUCET TRIM

- Compel® Bath Collection
- Valve Only (T14061)
- Tub Only (T14161)
- Shower Only (T14261)
- Tub/Shower (T14461)

FEATURES:

- Monitor® 14 Series pressure balanced single handle bath mixing valve trim
- Single function H₂Okinetic® Technology showerhead

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice® Universal rough valve body. (R10000 Series)
- Lever handle.
- Temperature only controlled with handle.
- Field adjustable means to limit handle rotation into hot water zone.
- 120° maximum handle rotation.
- All parts replaceable from the front of the valve.
- 2.0 gpm @ 80 PSI.
- Red/blue pad print temperature indicators on escutcheon.
- "LHD" models indicate less showerhead.
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness. RP77991 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- Indicates compliance to ICC/ANSI A117.1 - Valve Control only
- EPA WaterSense®

T14261SS ✓




55 E 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2015 Masco Corporation of Indiana


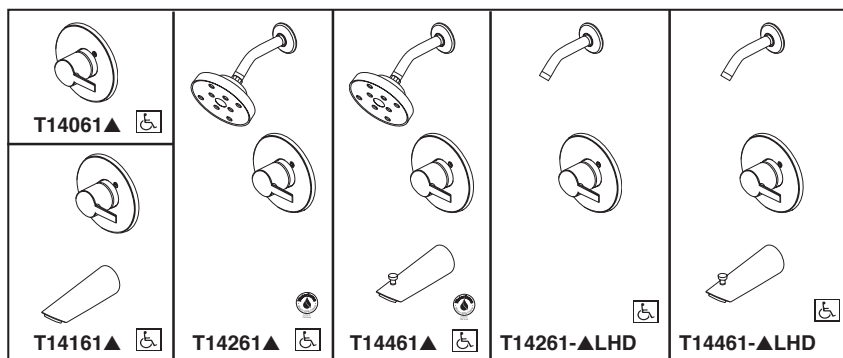


Submitted Model No.: _____

Specific Features: _____


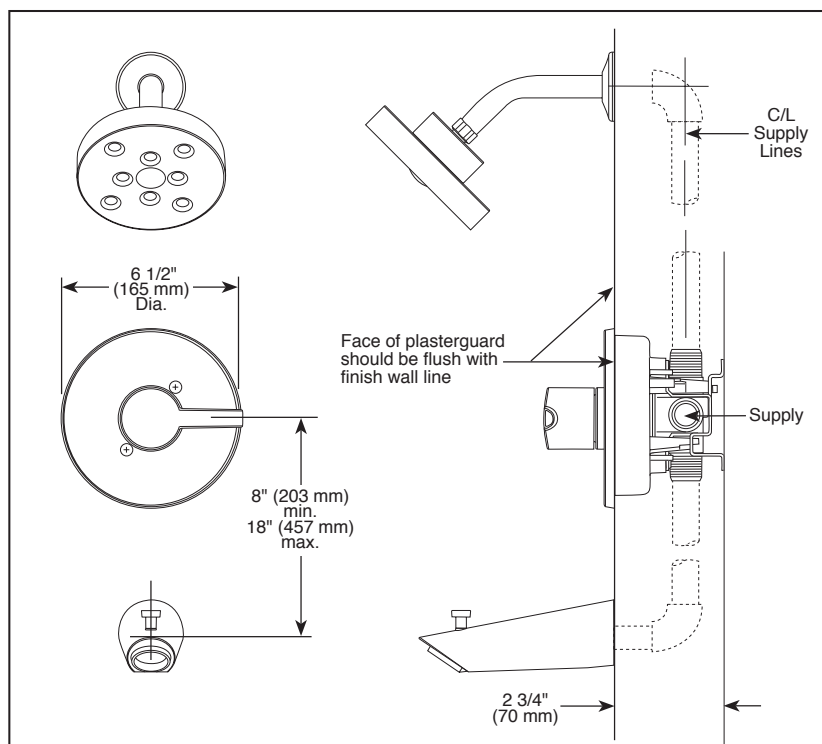


▲ Designate Proper Finish Suffix

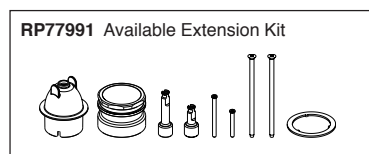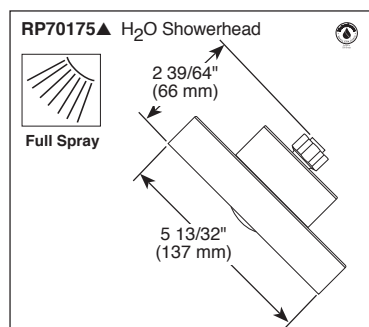

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T14061 Rev. G

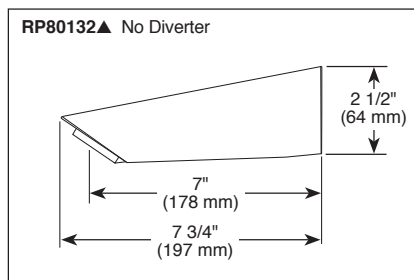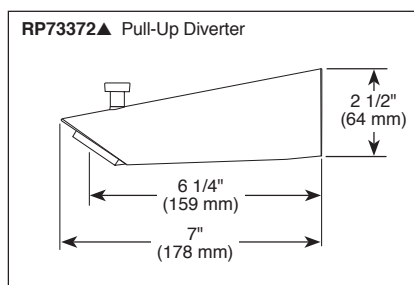

TUB AND SHOWER FAUCET TRIM

- Compel® Bath Collection
- Valve Only (T14061)
- Tub Only (T14161)
- Shower Only (T14261)
- Tub/Shower (T14461)

FEATURES:

- Monitor® 14 Series pressure balanced single handle bath mixing valve trim
- Single function H₂Okinetic® Technology showerhead

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice® Universal rough valve body. (R10000 Series)
- Lever handle.
- Temperature only controlled with handle.
- Field adjustable means to limit handle rotation into hot water zone.
- 120° maximum handle rotation.
- All parts replaceable from the front of the valve.
- 2.0 gpm @ 80 PSI.
- Red/blue pad print temperature indicators on escutcheon.
- "LHD" models indicate less showerhead.
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness. RP77991 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- Indicates compliance to ICC/ANSI A117.1 - Valve Control only
- EPA WaterSense®

T14061SS ✓




55 E 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2015 Masco Corporation of Indiana

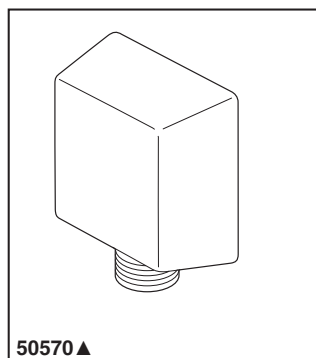

50570SS ✓

Submitted Model No.: _____

Specific Features: _____

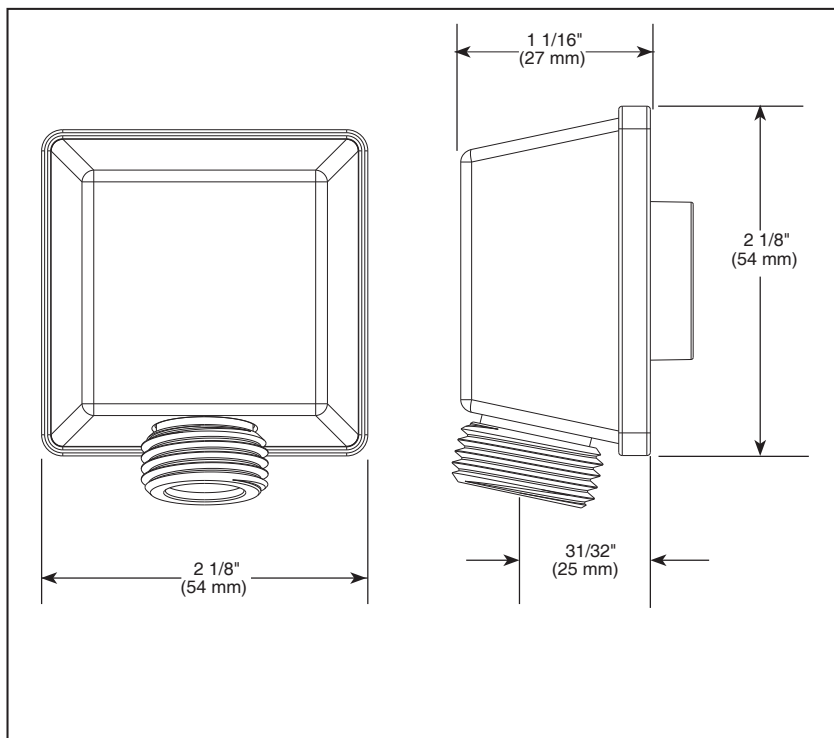

▲ Designate proper finish suffix



ELBOW

STANDARD SPECIFICATIONS

- Solid brass construction.
- 1/2" female NPT inlet.
- 1/2" male NPSM outlet for connecting to shower hoses.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-B-50570 Rev. A



55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2012 Masco Corporation of Indiana

Submitted Model No.: **56302SS** ✓
 Specific Features: _____



ADA GRAB BARS WITH MECHANISMS

■ ADA Compliant

STANDARD SPECIFICATIONS:


- Brass construction: 40024, 56302
- Manufactured using engineering grade plastics: U6300
- Design allows for hand shower to be mounted either left or right of the bar
- Handshower mount is fully adjustable
- Operable by left hand, right hand or closed fist
- 24" decorative slide bar: 40024, 56302
- 60-82" stretchable hose: 56302

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

Indicates compliance to ICC/ANSI A117.1

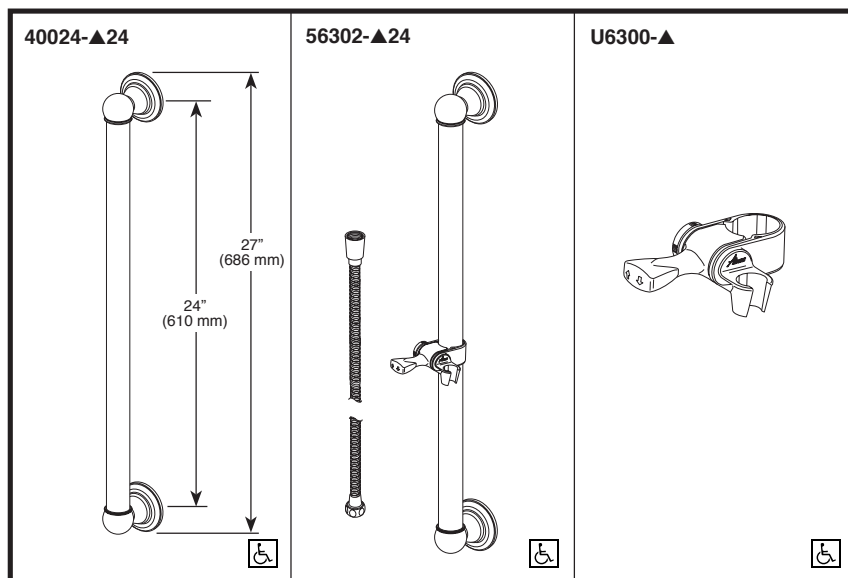

▲ Designate proper finish suffix

59424SS24PK ✓

Submitted Model No.: _____
 Specific Features: _____



see what Delta can do™

ACTIVTOUCH® HANDSHOWER


- Three Spray Selection Buttons
- "Pause Control" Button

STANDARD SPECIFICATIONS:

- Maximum 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (51504, 54424-PK, 55424, 59424-PK)
- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa (54424-18-PK, 59424-18-PK)
- Nine spray settings - pause is a non-positive shut-off
- Three spray selection buttons for a simple one-handed push of a button
- 60"-82" stretchable metal hose: 51504, 55424, 54424
- 28" contemporary adjustable wall bar: 51504
- Adjustable wall mount: 55424
- Adjustable shower arm mount: 54424
- ADA compliant grab bar when installed per accessibility guidelines of the act


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

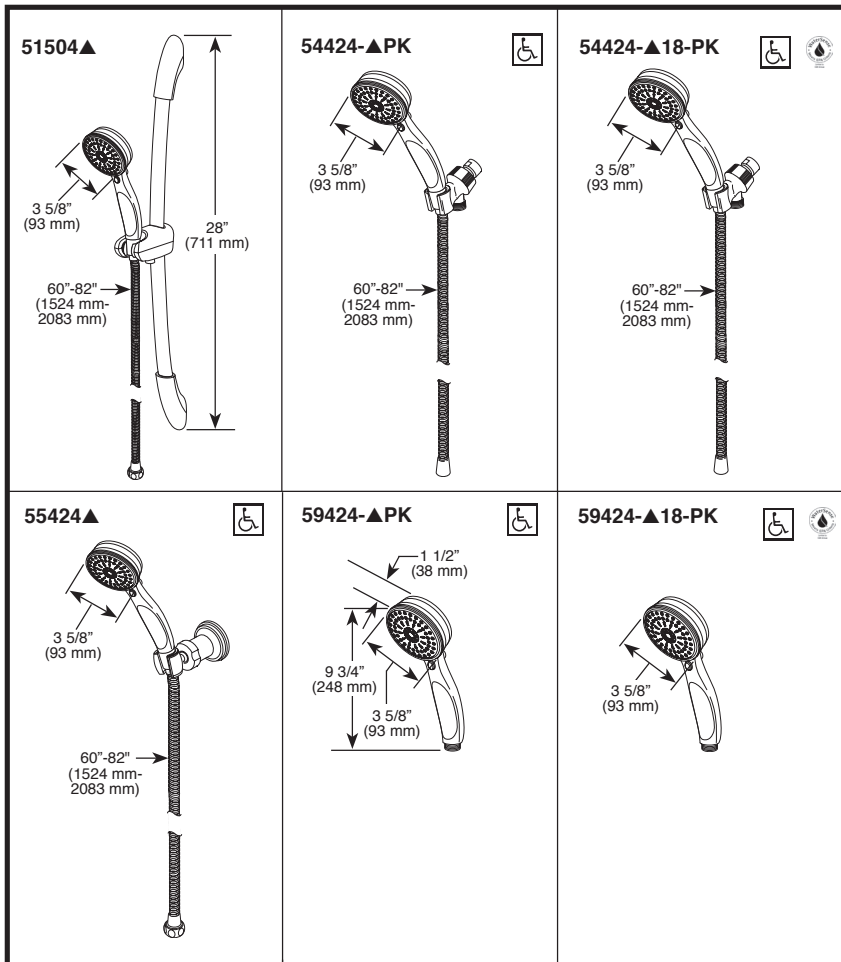

▲ Designate proper finish suffix

Spray Patterns

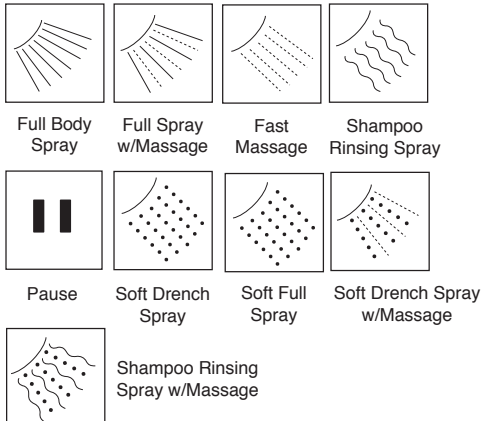

- ◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- EPA WaterSense®
- Indicates compliance to ICC / ANSI A117.1

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.


DSP-B-51504 Rev. G

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2017 Delta Faucet Company



Model No: R10000-UNWS

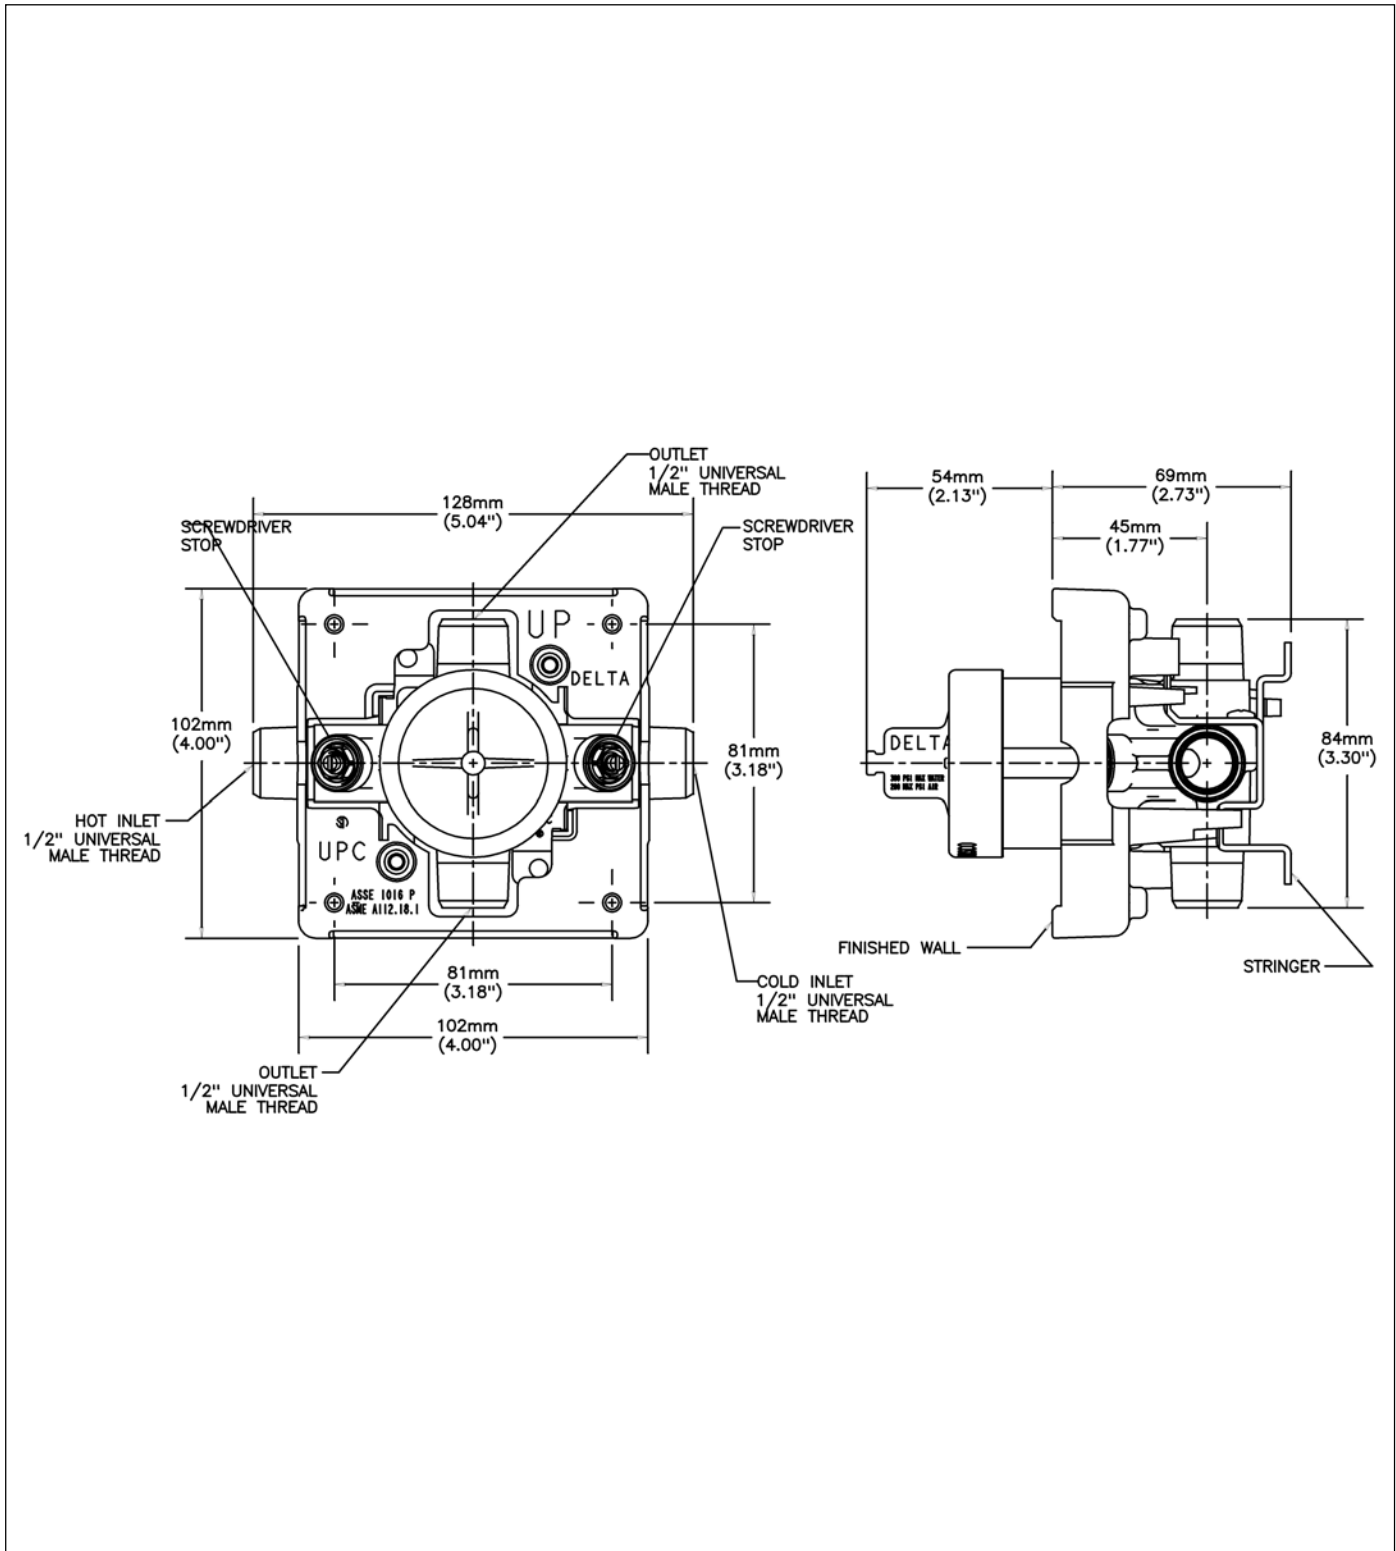

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 10, 2018.


Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

- 1.0.15644


MODEL: P3838B5T.V2*

ALL ACCESSORIES OPTIONAL


TAG P10
**BARRIER
FREE**



PERSPECTIVE VIEW - N.T.S.

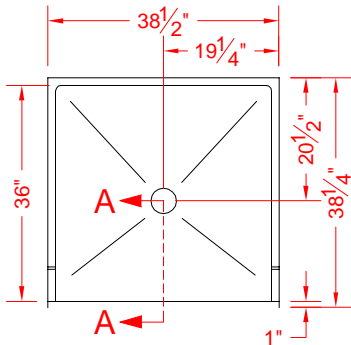


TOP VIEW - SCALE $\frac{3}{8}'' = 1'-0''$



Features:

- Molded, single-piece gelcoat/fiberglass shower pan
- Available in various threshold heights
- On all threshold heights 1-1/2" or taller, no mud set is required
- On all threshold heights 1-1/4" or shorter, no mud set is required and an anchoring adhesive kit is supplied



FRONT ELEVATION - SCALE: $\frac{3}{8}'' = 1'-0''$

***OTHER THRESHOLD HEIGHTS
AVAILABLE UPON REQUEST**

	UNIT HEIGHT	THRESHOLD HEIGHT
MODEL #	Y	Z*
P3838B5T.V2	4-5/8"	5/8" MIN
P3838B2T.V2	6"	2" MAX

* - SEE BACK FOR DETAIL SECTIONS

PRODUCT SPECIFICATIONS:

- Single-piece shower pan shall be constructed of gelcoat/fiberglass
- Rough-In: Stud opening +1/4" -0" Nominal Dimensions.

C.S.I. FORMAT SPECIFICATION TEXT AVAILABLE

PRODUCT INFORMATION:

- Colors: White as standard, others to match any major fixture manufacturer, also available with sprayable solid surface in many colors
- Custom curb heights, other than shown, are available (between min. and max.)

ACCESSORIES:

INSTALLED BY OTHERS:


- T-shaped rubber WaterStopper kit
- Semi-permanent threshold adaptor
- No-caulk brass drain

CODES:

- Designed and manufactured in compliance with the following standards and codes:
- ANSI Z124.2 Standards for Plastic Showers
 - IPC International Plumbing Code
 - UPC Uniform Plumbing Code


NOTICE OF LIMITATION:

- Adhere to floor as required

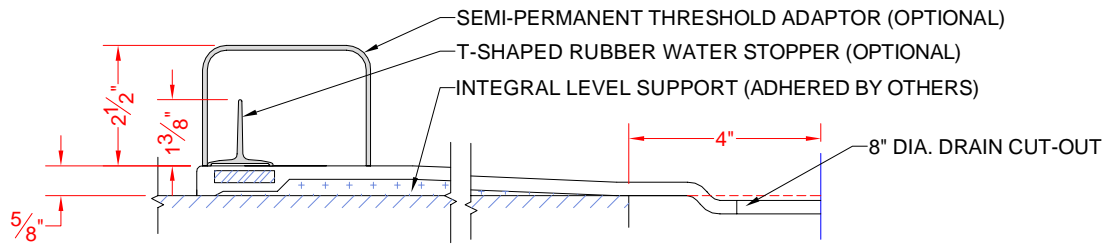


SECTION A-A - SCALE: 3" = 1'-0"

□ P3838B2T.V2

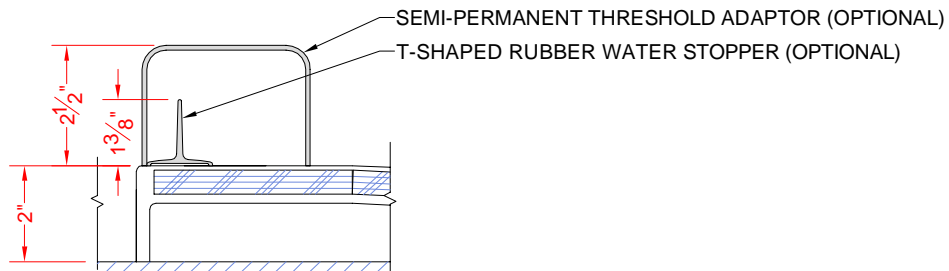

SECTION A-A - SCALE: 3" = 1'-0"

****OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST****

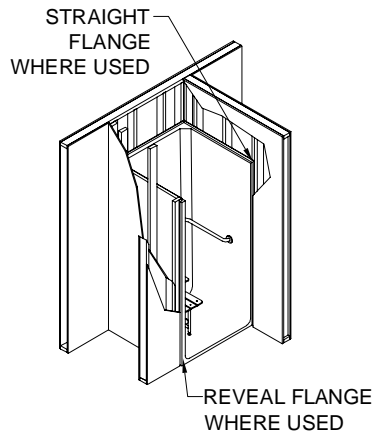


TYPICAL FRAMING


MODEL: P6034B75B*

ALL ACCESSORIES OPTIONAL


TAG P10
BARRIER
FREE



PERSPECTIVE VIEW - N.T.S.
MODEL SHOWN HERE AS:

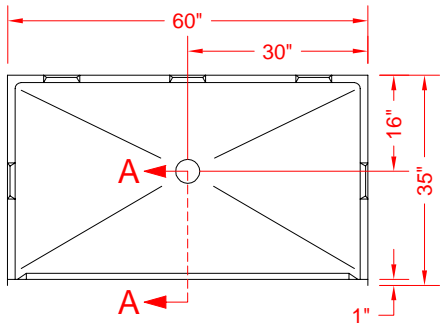


TOP VIEW - SCALE $\frac{3}{8}" = 1'-0"$



Features:

- Molded, one piece gelcoat/fiberglass shower pan
- Accessible fiberglass shower pan
- Beveled curb makes for easy access
- Available in various Threshold heights
- On all threshold heights 1-1/2" or taller, no mud set is required
- On all threshold heights 1-1/4" or shorter, no mud set is required, but an adhesive kit is supplied

*OTHER THRESHOLD HEIGHTS
AVAILABLE UPON REQUEST



FRONT ELEVATION - SCALE: $\frac{3}{8}" = 1'-0"$

	UNIT HEIGHT	THRESHOLD HEIGHT
MODEL #	Y	Z*
P6034B75B	5-3/4"	3/4" MIN
P6034B2B	7"	2" MAX

* - SEE BACK FOR DETAIL SECTIONS

PRODUCT SPECIFICATIONS:

- One piece shower pan shall be constructed of gelcoat/fiberglass
- Rough-In: Stud opening +1/4" -0" Nominal Dimensions.

C.S.I. FORMAT SPECIFICATION TEXT AVAILABLE

PRODUCT INFORMATION:

- Colors: White as standard, others to match any major fixture manufacturer, also available with sprayable solid surface in many colors

ACCESSORIES:

INSTALLED BY OTHERS:

- T-Shaped Rubber WaterStopper Kit
- Semi-permanent Threshold Adapter
- Caulkless drain

CODES:


Designed and manufactured in compliance with the following standards and codes:
-A.N.S.I. Z124.2 Standards for Plastic Showers
-I.P.C. International Plumbing Code
-U.P.C. Uniform Plumbing Code

NOTICE OF LIMITATION:




BEST BATH SYSTEMS INC.
www.best-bath.com 1-800-727-9907

We reserve the right to make revisions without notice in the design of fixtures or in packaging unless this right has specifically been waived at the time the order is accepted.

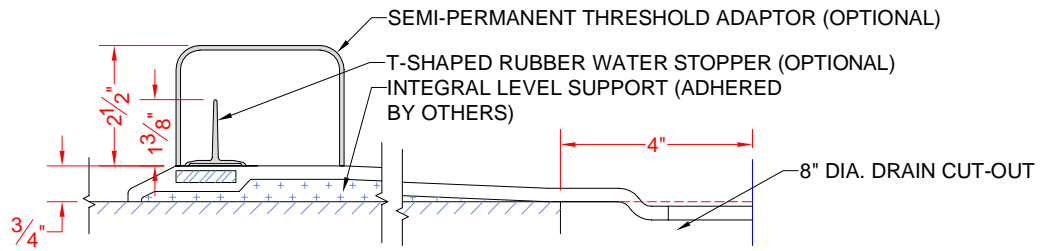

SECTION A-A - SCALE: 3" = 1'-0"

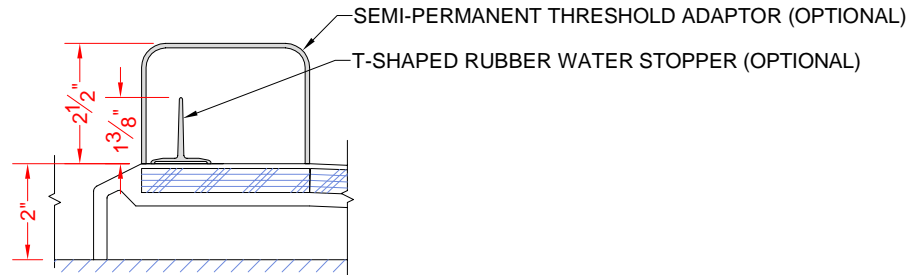


SECTION A-A - SCALE: 3" = 1'-0"

****OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST****



HSS2000xS88 SILICONSEAL™

Adhesive Gasketing - Tested and Classified for Fire and Smoke




About Edge Seals:

Edge Seals are Category G materials that have demonstrated their ability to assist the door in meeting the positive pressure fire test requirements. Category G materials are necessary for use with Category B Door assemblies. Category G Edge Seals may also need a Category H Smoke Seal for a complete fire and smoke assembly.

About Fire & Smoke Combination Gasketing:

These combination fire and smoke gaskets provide an excellent seal against fire and smoke transfer around a rated door assembly. These products meet the requirements of Category G and H seals.

- Adhesive backed.
- High temperature silicone.
- Self-extinguishing and non-toxic.
- Longest-lasting commercial grade door seal.
- Seals against smoke, fire, air, sound and weather.
- Unaffected by sunlight, ozone and ultraviolet rays.
- Impervious to fungus and mildew.




Product / Available Finishes:

HSS2000xS88BL	Black Silicone/Graphite
HSS2000xS88C	Clear Silicone/Graphite
HSS2000xS88D	Dark Bronze Silicone/Graphite
HSS2000xS88TAN	Tan Silicone/Graphite
HSS2000xS88W	White Silicone/Graphite

Testing/Ratings:



Tools Required:

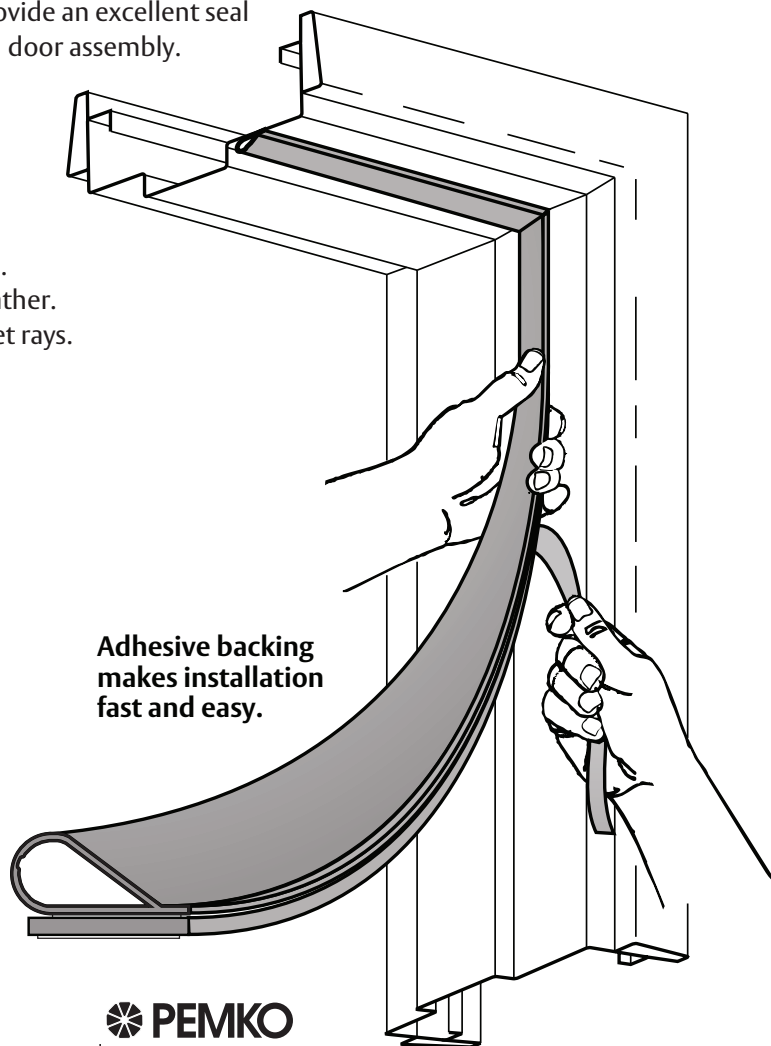

UNITED STATES:

VENTURA, CA
Ph: 800.283.9988
Fax: 800.283.4050
MEMPHIS, TN
Ph: 800.824.3018
Fax: 800.243.3656

CANADA:

VANCOUVER, BC
Ph: 877.535.7888
Fax: 877.535.7444
TORONTO, ON
Ph: 866.243.9816
Fax: 866.243.9817

www.pemko.com

© 2007 Pemko Manufacturing Co.
HSS2000xS88_WEBINS
Rev 1 - 07.01.07


Architectural Door Accessories

TAG D1

ASSA ABLOY

The global leader in
door opening solutions

Rockwood K1038 - Metal Kick Plate - Economy Duty .038" Thick

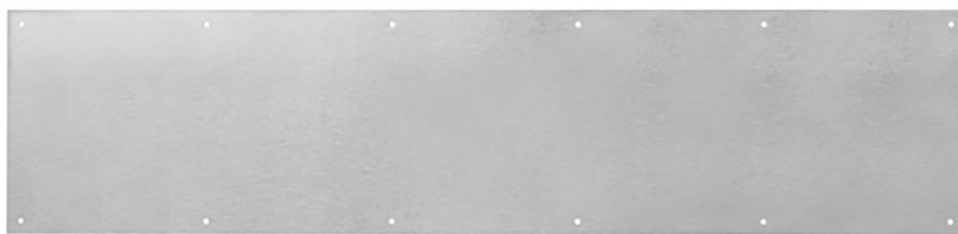

Available Finishes:

- US32D/630

WEIGHT:
8" x 34" = 3.2 lbs.

Specifications:

MATERIAL:

.038" Stainless Steel

FASTENERS:

#6 x 5/8" Oval Head Sheet Metal Screws

FEATURES:

- Push Side Plate Width - 2" less than door width
- Pull Side Plate Width - 1 1/2" less than door width

ORDERING:

Specify height x width x finish code. Add any options **8" x 34" @ 3.2lbs**

OPTIONS:

- SA - self-adhesive mounting
- **TEK - self-drilling screws**
- TORX - security torx screws
- Cutouts for locks, louvers, or windows

NFPA 80 STANDARDS - 2-4.5 Protection Plates: Factory-installed protection plates shall be installed in accordance with the listing of the door. Field-installed protection plates shall be labeled and installed in accordance with their listing.

Exception: Labeling is not required where the top of the protection plate is not more than 16 in. (406 mm) above the bottom of the door.

300 Main Street
Rockwood, Pennsylvania 15557
P: 800.458.2424 • F: 800.922.9212
www.rockwoodmfg.com • orders.rockwood@assaabloy.com

Copyright © 2017, Rockwood Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Rockwood Manufacturing Company is prohibited.

CS-K1038 1/17

WOODFOLD Custom Accordion Doors

What started as a small woodshop in Forest Grove some 50 years ago now stands as a testament to modern woodcrafting. Which means serious benefits for our customers in the form of product selection, development, design and value. Woodfold combines decades of craftsmanship with today's most advanced computers and machinery for an unsurpassed level of quality, efficiency and precision. And, this is just the beginning. After all, we're only 50 years old and that's quite young in our minds.

WOODFOLD SERIES 140

Residential Closet Doors.

Routinely specified in single-family homes, college dormitories, retirement and assisted living facilities and health-care applications. The Series 140 is a durable, space-saving option for close-quarters. The Series 140 stacks left or right. It is finished on one side and available in vinyl and hardwood panel options.

WOODFOLD SERIES 220

Residential Room Dividers And Doors.

The Series 220 is as attractive and durable as the Series 140, but offers a finish on both sides. Ideal for efficiency-style housing units, basement or family room recreation areas and galley-style kitchens. Available in a variety of durable vinyl and hardwood panel options.

WOODFOLD SERIES 240

Commercial To Residential. Institutional To Industrial.

The Industry-Leading Accordion Door.

The Series 240 door combines the merits of durability and function with natural beauty. It is routinely specified for institutional, commercial and industrial projects, offering you choices like curvable track, locks, latches and multiple meeting posts to further expand the design capabilities of the accordion concept.

WOODFOLD SERIES 440 & 540

Visifold, See-Through Commercial Security Doors.

The Series 540 combines the smooth, flawless operation of the Woodfold hardware hinge system with enhanced security between panels thanks to a ridged PVC hinge over a steel rod, offering protection and an unobstructed view of what's inside. The Series 440 uses the same construction, yet features a flexible vinyl PVC panel connector in place of the knuckle hinge and steel rods. Also available with multiple latch and locking options. Can be customized by combining acrylic panels with hardwoods, vinyl-lams or aluminum panels.

WOODFOLD SERIES 640 & 740

Alumifold Security Doors.

Sturdy doors with our exclusive hardware hinge system and solid aluminum panels. The Series 640 & 740 features single-piece, extruded aluminum body panels in solid or perforated aluminum in bronze, gold or clear (silver) finishes for a streamlined, modern look. Suitable for a variety of installations including store enclosures and corridor dividers.

WOODFOLD SERIES 2100

Single-Wall Doors For Some Degree Of Sound Reduction.

Delivering sound reduction in an attractive, reasonably priced, single-wall door, the Series 2100 is ideal wherever some degree of sound reduction is needed, such as restaurants, offices and churches. Also minimizes heat loss or air exchange between rooms.

WOODFOLD SERIES 3300

Dual-Wall Doors For Moderate Sound Reduction.

An attractive way to draw the line between loud and quiet, the Series 3300 is perimeter-sealed and acoustic-lined for moderate sound reduction. Matching dual-wall construction with the proven durability of our exclusive hardware hinge system and rigid body panels, it conveniently allows the selection of alternate finish materials on each door face.

The Nuts And Bolts Of Our Nuts And Bolts

Our exclusive steel hardware hinge system is designed to keep doors operating smoothly and lends fantastic strength and long-term durability. It also means the doors stay solidly in place while both open and closed.

Architectural Specifications

Woodfold doors shall be accordion-type with panels connected continuously along the top and bottom by a steel hardware hinge system. Individual hinges are riveted to those adjoining, and contain stops to maintain a uniform extended position. Extruded vinyl seals securely connect all adjoining panels top to bottom (except Series 540 & 740). Doors shall be suspended by nylon wheels from aluminum overhead track. All necessary hardware shall be included for normal installation.

Available Finishes

Natural hardwoods, woodgrain vinyls, solid vinyls, textured vinyls, custom paint finishes, custom stain finishes, high pressure decorative laminate finishes, aluminum and applied murals.

The Woodfold Guarantee

All Woodfold doors are custom made to fit each opening and warranted against failure due to defective materials or workmanship.



ADA Compatible




The Series 140, 220, 240, 440, and 540 were tested for ADA compliance for opening load force per ADA/BOMA SEC 4.1311. Tests conducted by MEI Charlton, Inc., Portland, OR.



Employee-Owned

You're assured a precise level of workmanship, service and long-term value with each order because every Woodfold employee shares in the success of a job well done.

WOODFOLD



Woodfold Mfg., Inc.

Box 346

Forest Grove, OR 97116-0346 U.S.A.

503-357-7181 • 503-357-7185 (FAX)

www.woodfold.com

Distributed By: